


Jeweled bearing

Supplied with limit pointers

contact points (page 115~118)

DIAL INDICATOR WITH LIFTING LEVER

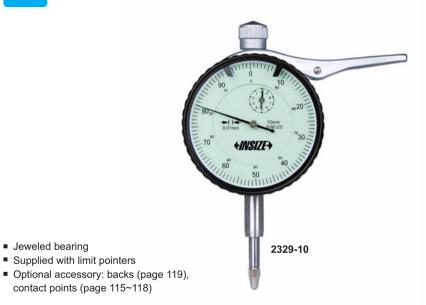

		Unit: mm				
		16 8				
45	828	053.5				
68.5	21 18.5	Ø8.0009 Ø4.5 M2.5x0.45				

Code	Range	Graduation	Accuracy	Hysteresis	Range/rev	Dial reading	Remark
2329-10	10mm	0.01mm	20µm	3µm	1mm	0-100	flat back